

Timing Mode: **DELAY ON MAKE**
 Category: **TIMER WITH RELAY**
 Series: **TNC**



PELCO COMPONENT TECHNOLOGIES • 855 227 3526

PLUG-IN RELAY TIMER, IC DIGITAL




TNC Timers

The TNC Delay on Make meets the needs of customers who require IC digital timing circuits with round octal, round magnal or QC bases for plug-in installation. The units are available in SPDT and DPDT relay forms up to 10 amp with fixed or adjustable time periods.


Timing Mode

Application of input voltage to the timer starts the time delay. At the end of the delay period, the load is energized.

To reset, remove the input voltage to the timer.

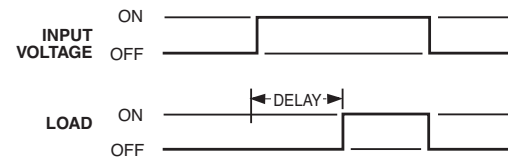

FEATURES

- CMOS Integrated Circuit digital timing
- Multi-board construction
- Relays are sealed
- Proven circuitry
- Standard octal (8 pin), magnal (11 pin) plug-ins or 4.75 mm (0.187") blade terminal mountings
- Fixed or variable time adjustment
- Optional remote time adjustment
- Timing ranges from 0.1 to 1000 seconds standard (special time settings and ranges up to 72 hours also available)
- 0.1% Repeat accuracy
- 100% Operational testing before shipping
- 

072816

SPECIFICATIONS

Input Voltages: VAC: 12, 24, 120, 230, 50/60Hz
 VDC: 12, 24
Special AC or DC voltages available

Operating Voltage: $\pm 20\%$ of nameplate voltage

Relay Contact Ratings: 5 amp DPDT,
 10 amp DPDT optional

Repeat Accuracy: $\pm 0.1\%$ under fixed operating conditions

Reset Time: 50 milliseconds

Tolerances: Fixed: $\pm 10\%$, Optional: $\pm 5\%$, $\pm 1\%$
 Variable: $+20\%$, -0% , Optional: $+10\%$, -0%

Life Expectancy:

Mechanical: 1 million operations
Electrical: Up to 100,000 operations at full current load

Protection:



Polarity Protection: All DC units have reverse polarity protection
Transient Protection: 25 joules

Temperature Ranges:

Storage: -40°C to $+85^{\circ}\text{C}$
Operating: -25°C to $+65^{\circ}\text{C}$

Housing Material: High-impact, UL-approved black Lexan

BASIC WIRING AND DIMENSIONS

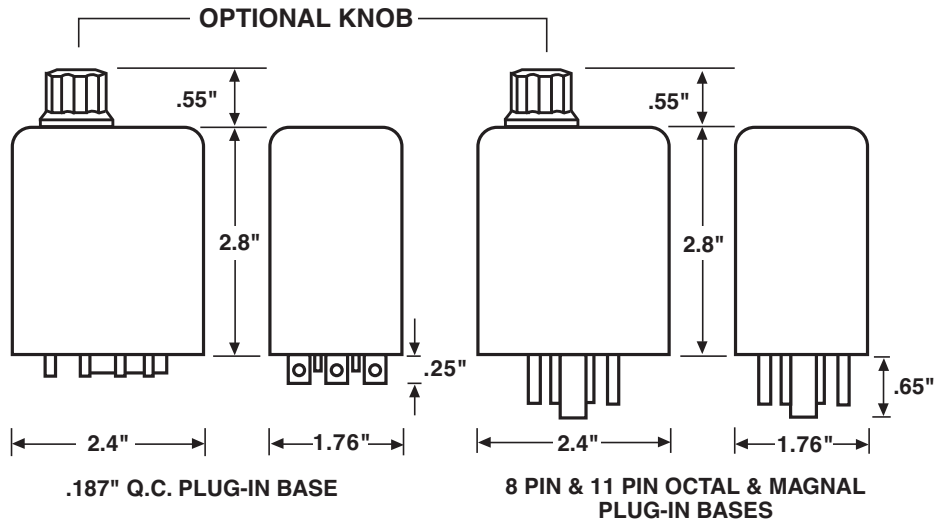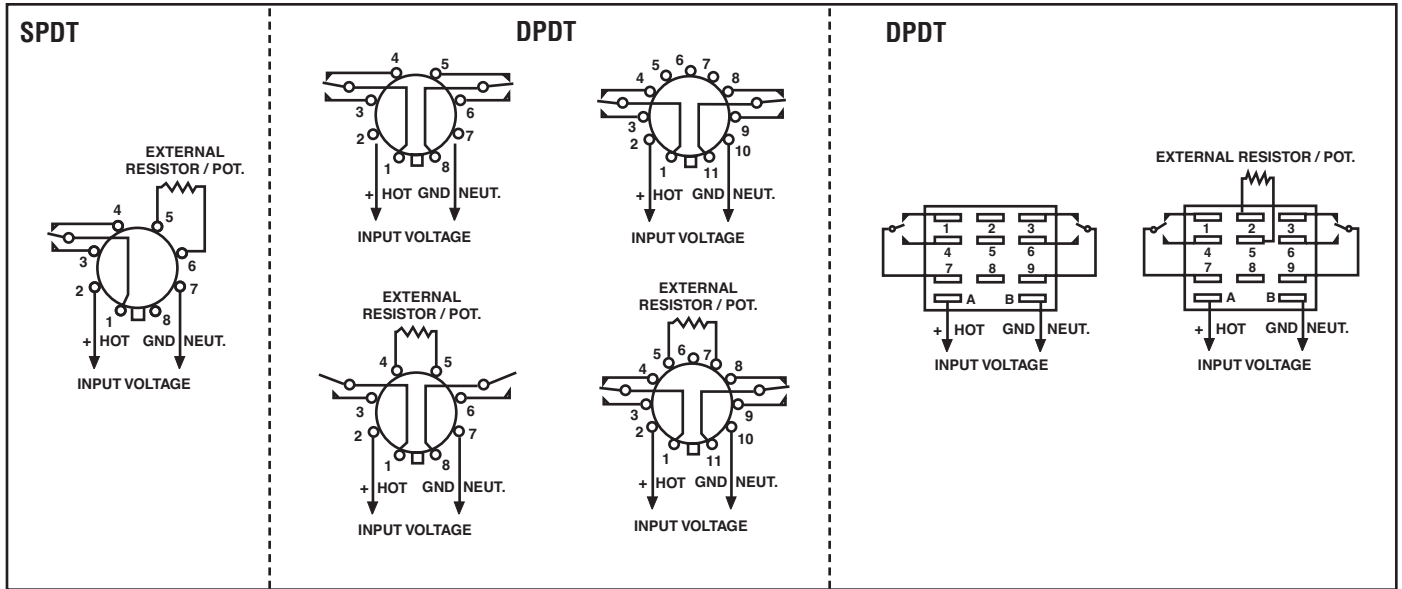

072816

OPTIONS SELECTION

Mode of Operation	Series	Input Voltage	Examples of Time Ranges	Tolerance	Time Adjust. Method	Base Style	Options
Delay On Make	TNC	1 120 VAC	VARIABLE TIME PERIODS 0001 .1 to 1 sec. 0010 .1 to 10 sec. 0100 1 to 100 sec. 1000 10 to 1000 sec. Any range up to 72 hours available on special order. FIXED TIME PERIODS Specify time in full seconds or hours followed by the letter "S" or "H" and the decimal amount of the main time unit. Examples: 5S5 is 5.5 secs 5H5 is 5.5 hours	X Standard (Fixed: ±10% Variable: +20% -0%) E Optional (Fixed, ±5%) F Optional (Fixed, ±1%) G Optional (Adjust.: +10%, -0%)	A Variable knob on timer B Variable with external potentiometer AOT supplied C Factory-fixed time D Fixed time with customer supplied resistor	1 8 Pin Round Octal Base 2 11 Pin Round Magnal Base 3 11 Pin Spade 0.187 Quick Connect	X Standard 5 amps H 10 amps (8 amps UL Recognized for USA and Canada.)
		2 230 VAC					
		3 24 VAC					
4 24 VDC	7 12 VDC						
8 SPECIAL AC	8 120 VDC						
9 SPECIAL DC	9 230 VDC						

EXAMPLE TNC 3 0010 X A 1 H

This is a "TN" series timer, Delay on Make, 24 volt AC, 10 second variable time period (standard tolerance), with adjustment knob on timer, 8 pin octal base, 10 amp relay.

Specifications subject to change without notice.