


Timing Mode: **DELAYED INTERVAL**  
 Category: **TIMER WITH RELAY**  
 Series: **TGCL**

## CUBE RELAY, DUAL ADJUSTABLE

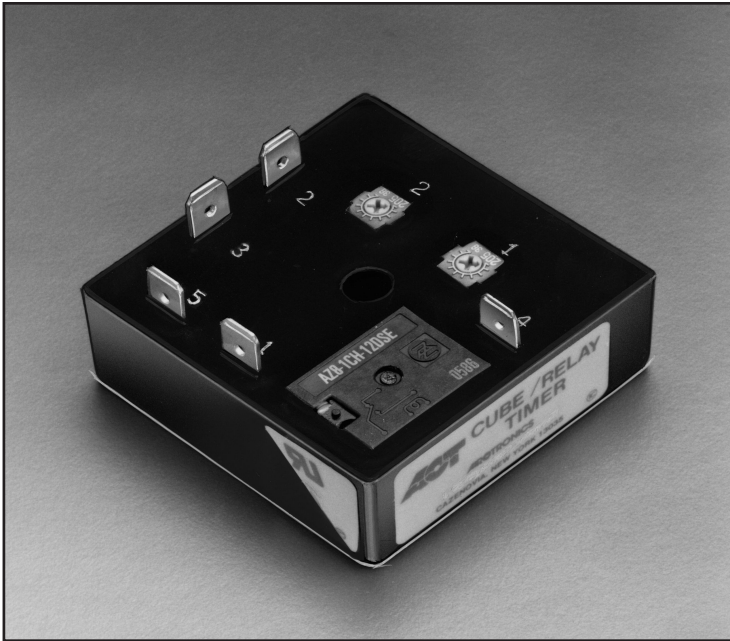

### TGCL Timers

TGCL series Cube Relay Delayed Interval Dual Adjustable Off/On timers are a unique combination of solid-state timing circuitry with a relay output in a compact cube configuration.

The time delay for both the "Off" cycle and the "On" cycle can be individually adjusted.


These timers offer the many advantages of a relay output and provide the same functional performance as plug-in relay timers, but at a significant cost savings.

### Timing Mode


Application of input voltage to the timer starts the "Off" time delay. At the end of the "Off" time delay, the "On" time delay starts, and the relay is energized.

At the end of "On" time delay, the relay is de-energized.



Removal of the input voltage resets the timer.

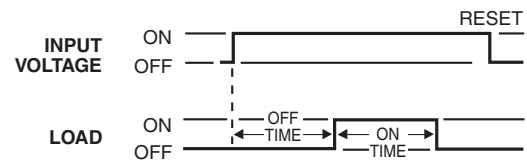

### FEATURES

- High current-carrying capacity up to 10 amps
- 100% Load isolation
- No leakage in N.O. position
- No heat sinking required
- Available in any time delay periods required
- Digital CMOS timing
- Transient protected
- No minimum load required
- Totally encapsulated for protection from harsh environments
- 100% Operational testing before shipping
-  RoHS compliance available

## BASIC WIRING AND DIMENSIONS

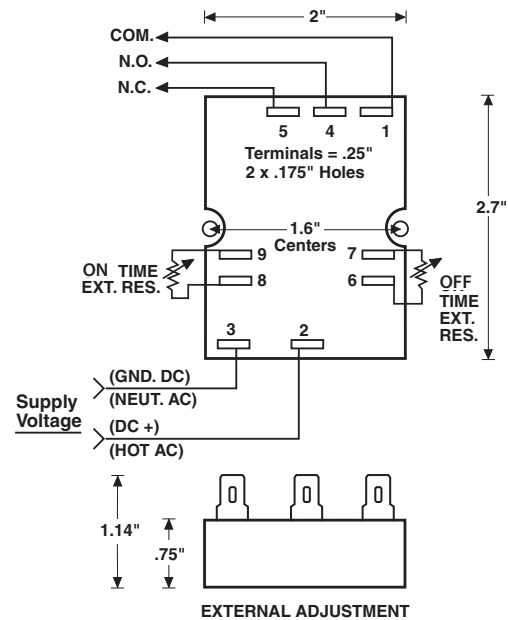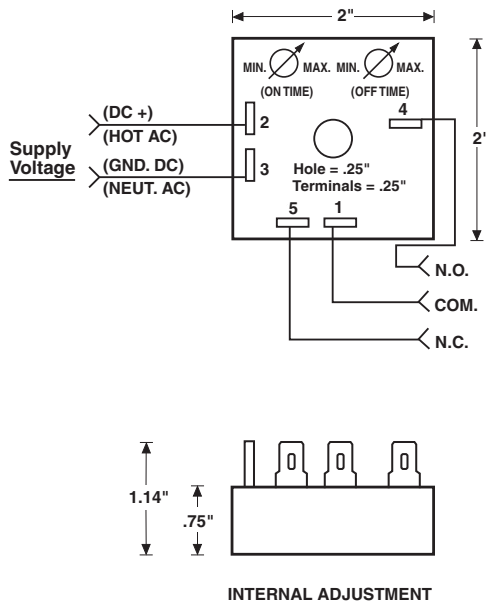

## SPECIFICATIONS

**Input Voltage:** VDC: 12, 24, or 48  
 VAC: 24, 48, 120, or 230, 50/60Hz  
*Special AC or DC voltages available*

**Time Delay:** Timing Mode: Delayed Interval  
 Type: Digital CMOS  
 Time Range: 0.5 second to 24 hours  
 Time Adjustment: Variable, with adjustments on timer, or terminals for external resistors or potentiometers

**Repeatability:**  $\pm 0.5\%$

**Setting Accuracy:** Variable time ranges:  
 +15% -5% max. time, -10% min. time  
 Fixed time periods:  $\pm 10\%$  of nominal time

**Reset/Recycle Time:** 250 milliseconds

**Initiate Time:** 6 milliseconds or less

**Life Expectancy:**  
*Mechanical:* 20 million operations  
*Electrical:* 100,000 operations at maximum load

**Protection:** Polarity Protection: All DC units have reverse polarity protection  
 Transient Protection: 18 joules  
 Dielectric Strength: 1800V RMS 60Hz

**Temperature Ranges:**  
 Storage:  $-40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$   
 Operating:  $-25^{\circ}\text{C}$  to  $+65^{\circ}\text{C}$

**Physical Data:**  
 Mounting: Surface with one #8 screw or two #6 screws  
 Connection & Termination: 0.25" quick connects

## OPTIONS SELECTION

Mode of Operation	Series	Input Voltage	Examples of Time Ranges	Time Adjustment Method	Relay Output Form	Options
Delayed Interval (Dual Adjustable)	TGCL	1 120 VAC	VARIABLE TIME PERIODS 0001 0.5 to 1 sec. 0010 .1 to 10 sec. 0100 1 to 100 sec. 1000 10 to 1000 sec. Any range up to 24 hours available.	A Variable, integral, adjustments on timer. B Variable, external, knobs remote. C Fixed, internal, time. D External resistors.	1 SPDT	H 10 Amps
		2 230 VAC				
		3 24 VAC				
		4 24-28 VDC				
		5 48 VAC	FIXED TIME PERIODS Specify time in full seconds or hours followed by the letter "S" or "H" and the decimal amount of the main time unit. Examples: 5S5 is 5.5 secs 5H5 is 5.5 hours			
		6 48 VDC				
		7 12 VDC				
		8 Any in between AC voltage (specify)				
		9 Any in between DC voltage (specify)				

EXAMPLE TGCL 1 0010/0010 CC 2 H TGCL, 120 VAC, 10 seconds On Delay, 10 seconds interval, both fixed SPST