


Timing Mode: **DELAY ON BREAK**  
 Category: **TIMER WITH RELAY**  
 Series: **TGM**

**CUBE RELAY, 10-30 AMPS**

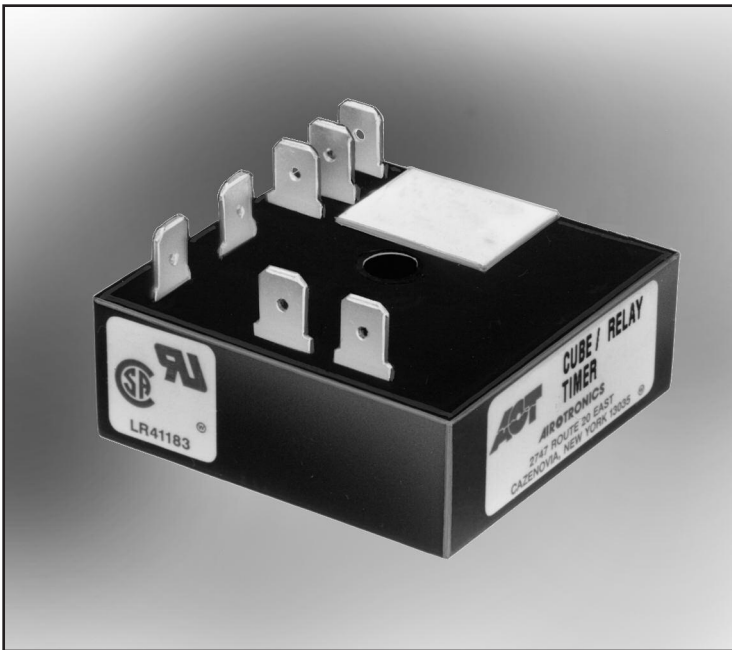

**TGM Timers**


TGM series Cube Relay Delay on Break timers are a unique combination of digital CMOS timing circuitry with a relay output in a compact 2" x 2" configuration.

These units provide the same functional performance as plug-in relay timers, but at significant cost savings.


Key features: Normally Open (N.O.) isolated initiate switch; relay common is totally isolated.

**Timing Mode**


Input voltage is applied continuously. Upon closure of the normally open isolated external initiate switch, the load is energized, and remains energized as long as it is closed. When the external initiate switch opens, the time delay is started. At the end of the time delay, the load is de-energized, and the timer is ready for another cycle.

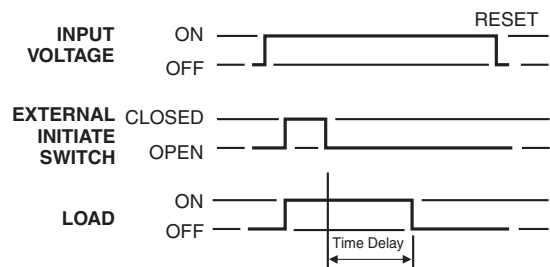


**FEATURES**

- High current-carrying capacity up to 30 amps
- Transient protected
- 100% Load isolation
- No leakage in N.O. position
- No heat sinking required
- Available in any time delay period required
- Digital CMOS timing
- No minimum load required
- Totally encapsulated for protection from harsh environments
- 100% Operational testing before shipping
- 
- RoHS compliance available

## BASIC WIRING AND DIMENSIONS

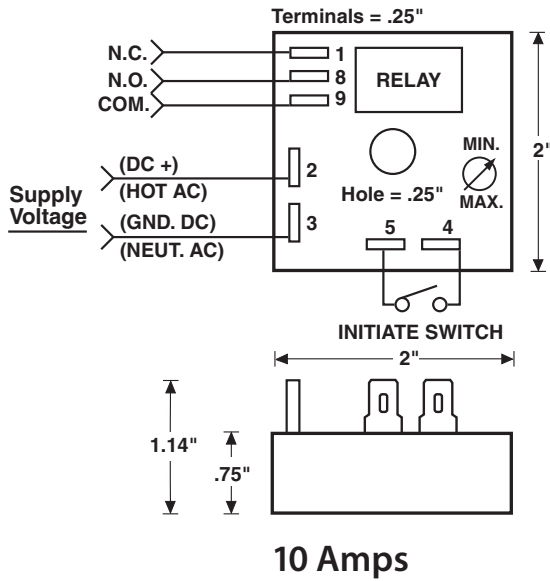

See page 177 for DPDT and 30 Amp Diagrams

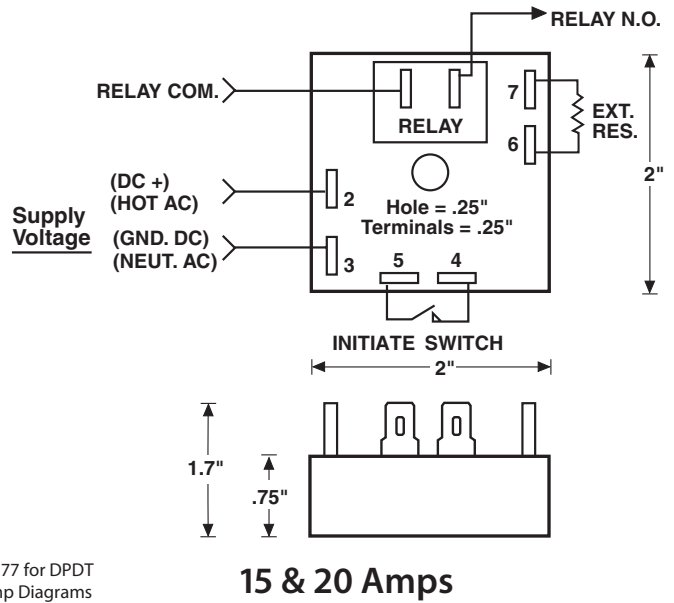

## SPECIFICATIONS

**Input Voltage:**

VDC: 12, 24 or 48  
 VAC: 24, 48, 120 or 230, 50/60Hz  
*Special AC or DC voltages available*

**Time Delay:**

*Timing Mode:* Delay on Break  
*Type:* Digital CMOS  
*Time Range:* 0.1 seconds to 24 hours  
*Time Adjustments:* Factory-fixed time period; variable, with adjustments on timer, or terminals for external resistor or potentiometer

**Repeatability:** ± 0.5%

**Setting Accuracy:** *Fixed time period:* ±10% of nominal time.  
*Variable time range:*  
 +15% -5% max. time, -10% min. time

**Reset/Recycle Time:** 25 milliseconds

**Initiate Time:** 6 milliseconds or less

**Relay Life Expectancy:**

*Mechanical:* 20 million operations  
*Electrical:* 100,000 operations

**Protection:**

*Polarity Protection:* All DC units have reverse polarity protection  
*Transient Protection:* 18 joules  
*Dielectric Strength:* 1800V RMS 60Hz

**Temperature Ranges:**

*Storage:* -40°C to +85°C  
*Operating:* -25°C to +65°C

**Physical Data:**

*Mounting:* Surface with one #8 screw  
*Connection & Termination:* 0.25" quick connects

## OPTIONS SELECTION

Mode of Operation	Series	Input Voltage	Examples of Time Ranges	Time Adjustment Method	Relay Output Form	Options
<b>Delay On Break</b>	<b>TGM</b>	1 120 VAC	<b>VARIABLE TIME PERIODS</b> 0001 0.1 to 1 sec. 0010 .2 to 10 sec. 0100 2 to 100 sec. 1000 20 to 1000 sec. Any range up to 24 hours available.	<b>A</b> Variable, integral, knob on timer. <b>B</b> Variable, external knob remote. <b>C</b> Fixed, internal, factory set. <b>D</b> Fixed, external, resistor remote.	1 SPDT	<b>H</b> 10 Amps <b>JN</b> 15 Amps (1.0 HP) <b>J</b> 20 Amps (1.5 HP) <b>Z</b> 30 Amps <b>W</b> Wires <b>S</b> Special
		2 230 VAC			2 SPST (N.O.)	
		3 24 VAC			3 SPST (N.C.)	
		4 24-28 VDC	<b>FIXED TIME PERIODS</b> Specify time in full seconds or hours followed by the letter "S" or "H" and the decimal amount of the main time unit. Examples: 5S5 is 5.5 secs 5H5 is 5.5 hours		*4 DPDT	
		5 48 VAC				
		6 48 VDC				
		7 12 VDC				
		8 Any in between AC voltage (specify)				
		9 Any in between DC voltage (specify)				

*Specifications subject to change without notice.*