


Timing Mode: **INTERVAL ON**
 Category: **TIMER WITH RELAY**
 Series: **TGL**

CUBE RELAY, 10-30 AMPS

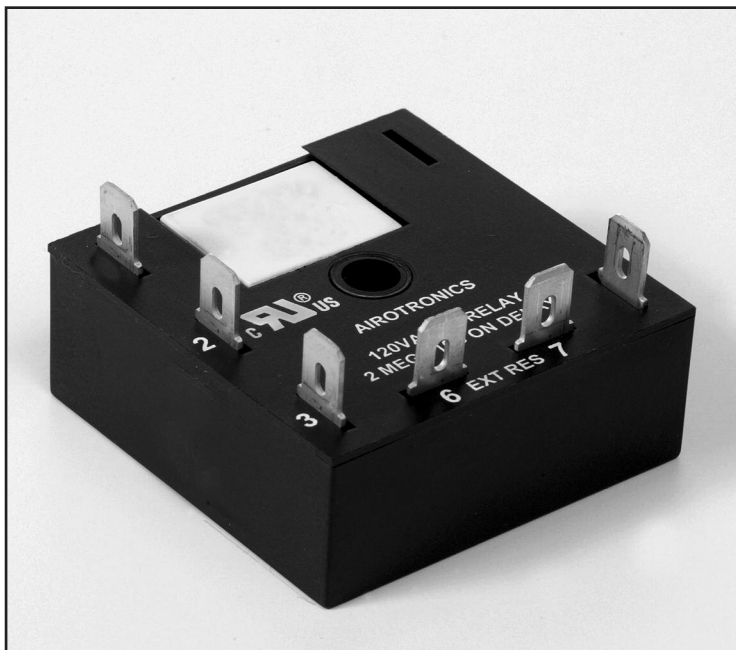


TGL Timers

TGL series Cube Relay Interval On timers are a unique combination of digital CMOS timing circuitry with a relay output in a compact 2" x 2" configuration.


These units provide the same functional performance as plug-in relay timers, but at significant cost savings.

Timing Mode


Application of input voltage to the timer energizes the load and starts the time delay. At the end of the time delay, the load is de-energized. Removal and re-application of input voltage resets the timer.

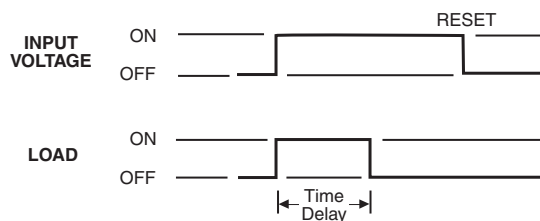

FEATURES

- High current-carrying capacity up to 30 amps
- Transient protected
- 100% Load isolation
- No leakage in N.O. position
- No heat sinking required
- Available in any time delay period required
- Digital CMOS timing
- No minimum load required
- Totally encapsulated for protection from harsh environments
- 100% Operational testing before shipping
- 
- RoHS compliance available

BASIC WIRING AND DIMENSIONS

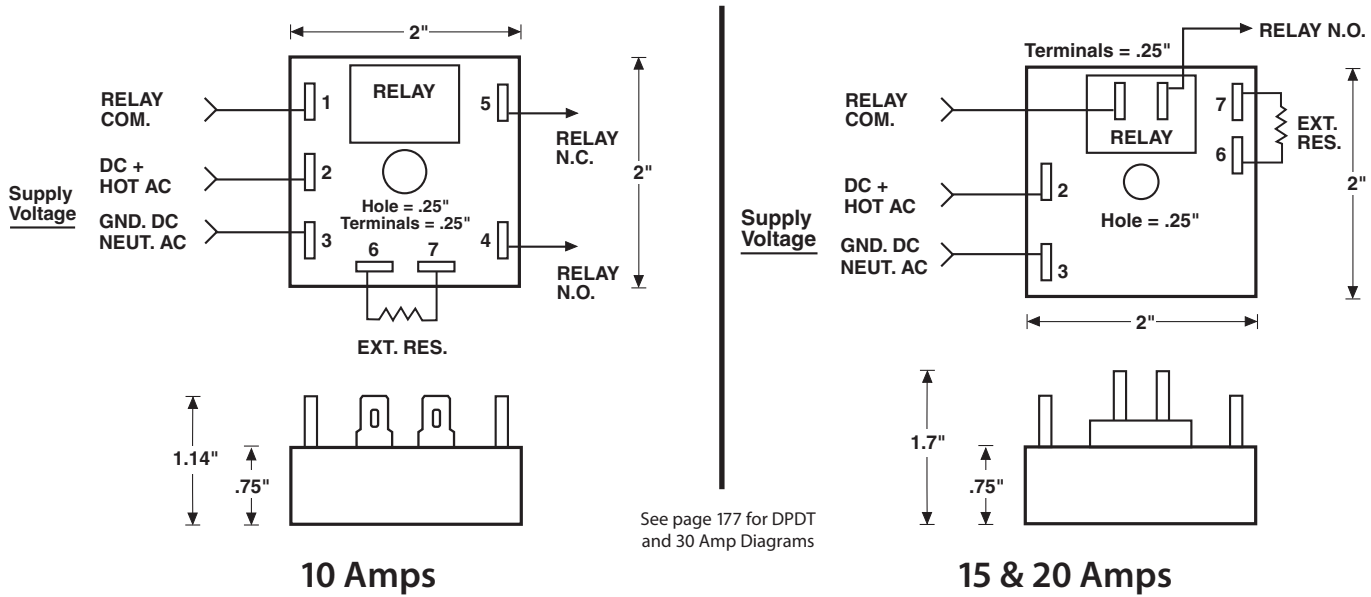

SPECIFICATIONS

Input Voltage:

VDC: 12, 24 or 48
 VAC: 24, 48, 120 or 230, 50/60Hz

Time Delay:

Timing Mode: Interval On
Type: Digital CMOS
Time Range: 0.1 second to 24 hours
Time Adjustments: Factory-fixed time period; variable, with adjustments on timer, or terminals for external resistor or potentiometer

Repeatability: ±0.5%

Setting Accuracy: *Fixed time period:* ±10% of nominal time.
Variable time range: +15% -5% max. time, -10% min. time

Reset/Recycle Time: 100 milliseconds

Initiate Time: 6 milliseconds or less

Relay Life Expectancy:

Mechanical: 20 million operations
Electrical: 100,000 operations

Protection:

Polarity Protection: All DC units have reverse polarity protection
Transient Protection: 18 joules
Dielectric Strength: 1800V RMS 60Hz

Temperature Ranges:

Storage: -40°C to +85°C
Operating: -25°C to +65°C

Physical Data:

Mounting: Surface with one #8 screw
Connection & Termination: 0.25" quick connects

OPTIONS SELECTION

Mode of Operation	Series	Input Voltage	Examples of Time Ranges	Time Adjustment Method	Relay Output Form	Options
Interval On	TGL	1 120 VAC	VARIABLE TIME PERIODS	A Variable, integral, knob on timer. B Variable, external knob remote. C Fixed, internal, factory set. D Fixed, external, resistor remote.	1 SPDT 2 SPST (N.O.) 3 SPST (N.C.) *4 DPDT *10 Amps only	H 10 Amps J 20 Amps (1.5 HP) JN 15 Amps (1.0 HP) Z 30 Amps W Wires S Special
		2 230 VAC 3 24 VAC 4 24-28 VDC 5 48 VAC 6 48 VDC 7 12 VDC 8 Any in between AC voltage (specify) 9 Any in between DC voltage (specify)				

Specifications subject to change without notice.